
BB-390B/U Battery Pack

Golden Season's BB390B/U battery pack is designed and engineered for use in tactical military operations.

Key features at glance

- High performance rechargeable nickel metal hydride
- Durable high impact plastic housing connector
- High reliability impact to plastic housing and connector enclosure
- Unit contains safety vented cells



- Battery voltage
- Electrolyte leakage

- Vibration

- Mechanical and thermal shock
- Insulation resistance

For use in:

Capacity:

Connector:

Shelf life:

Application:

Case material:

Operating temperature: Storage temperature:


Recommended charging:

Replacement:

Cell chemistry:

Nominal Voltage:
Nominal Weight:

Specifications
Dimension:

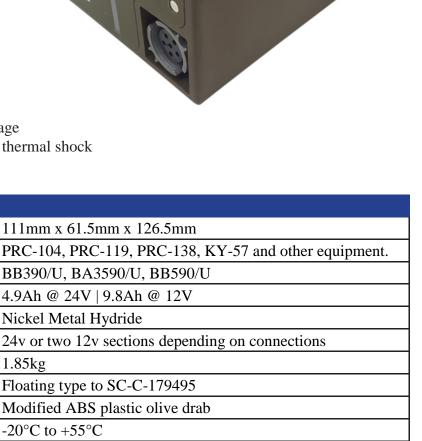

Up to 5 years depending upon storage condition.

Rugged portable electronics, Robotic, Military communication,

charging temperature should be between 5°C to 37°C. Lower temperature charging may result in low equipment run time.

Charge at constant current of 500 mA for 12 hours with

44 C	1 1	* . 1	
*Specifications a	re subject to char	ige without	nrior notice
5 Decineations a	ic sufficel to chai	120 WILIIOUL	DITOI HOUSE.

 -40° C to $+55^{\circ}$ C

AUV's and UUV's