Mobile shelters

Model A - C Series

Shelter Models 1A to 2A series


All shelters have in built window sets, cable inlets, air con / heating duct ports, ceiling and wall hooks. Insulation liners are optional and recommend with usage of ECU sets (heating and cooling). Shelters come complete with push poles, wind lines, stakes, groundsheet, carrier bag and repair kit.

A Series Models	
	1A model - 4.7m X 4.7m deployed Dome shaped, - 60kgs weight including insulation liner 2 to 3 persons to deploy - Can interconnect with other A series models
	1AT model - 3m X 4.7m deployed with one open side 52kgs weight including insulation liner - 2 to 3 persons to deploy - Can serve as a doorway to a B series shelter, and connect to other A series models.
Isometric View	2A model - 5.8m X 4.7m deployed Dome shaped, - 80kgs weight including insulation liner 3 to 4 persons to deploy - Can interconnect with other A series models


Shelter Models 2AT to 4A series

A Series Models	
Isometric View	2AT model - 4.2m X 4.7m deployed with one open side 72kgs weight including insulation liner - 3 to 4 persons to deploy - Can serve as a doorway to a B series shelter, and connect to other A series models.
lametric View	3A model - 7.1m X 4.7m deployed. Dome shaped, - 100kgs weight including insulation liner 4 to 5 persons to deploy - Can interconnect with other A series models
lacomatic View	3AT model - 5.3m X 4.7m deployed with one open side 92kgs weight including insulation liner - 4 to 5 persons to deploy - Can serve as a doorway to a B series shelter, and connect to other A series models.
Isometric View	4A model - 8.3m X 4.7m deployed Dome shaped, - 120kgs weight including insulation liner 6 to 8 persons to deploy - Can interconnect with other A series models

Shelter Models 4AT - 6A models

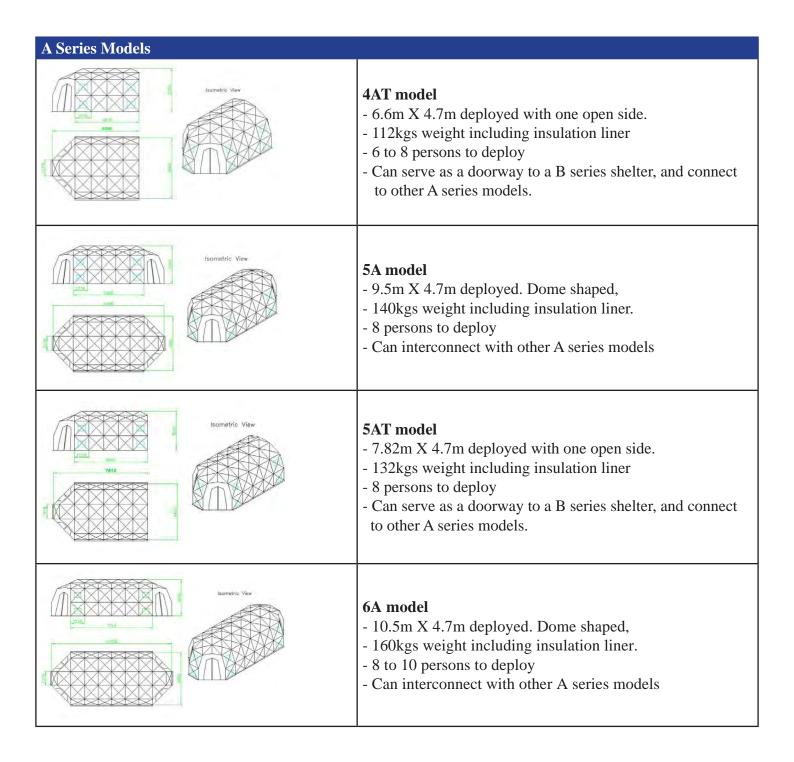

Shelter Models 6AT, B Series and 1C models

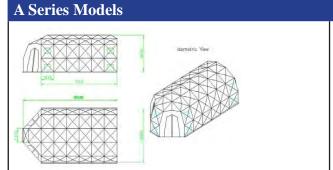

6AT model

- 9m X 4.7m deployed with one open side.
- 152kgs weight including insulation liner
- 8 to 10 persons to deploy
- Can serve as a doorway to a B series shelter, and connect to other A series models.

B Series Models

B series shelter

- 6 X 5 X 2.3m
- Very popular model due to useable area.
- Can be deployed with 4 persons.
- Weight: 110kgs with insulation liner
- Can connect to all models to form large deployment area.
- Using 1AT models, a blackout entrance vestibule can be created.
- Can be made larger or smaller as per request

C Series Models 1C model - 4m X 4m deployed. Hut shaped, - 55kgs weight including insulation liner. - 2 to 3 persons to deploy - Can interconnect with other C series models

Shelter Models 1CT to 3C Series

C Series Models	
2009	1CT model - 2.8m X 4m deployed. Hut shaped, - 45kgs weight including insulation liner 3 to 4 persons to deploy - Can interconnect with other C series models - Can serve as doorway and vestibule
	2C model - 5.6m X 4m deployed. Hut shaped, - 75kgs weight including insulation liner 3 to 4 persons to deploy - Can interconnect with other C series models
Luxmette: Vae	2CT model - 4.35m X 4m deployed. Hut shaped, - 65kgs weight including insulation liner 3 to 4 persons to deploy - Can interconnect with other C series models - Can serve as doorway and vestibule
	3C model - 7.1m X 4m deployed. Hut shaped, - 95kgs weight including insulation liner 4 to persons to deploy - Can interconnect with other C series models

Shelter Models 3CT to 5CT series

C Series Models	
537	3CT model - 5.8m X 4m deployed. Hut shaped, - 85kgs weight including insulation liner 3 to 4 persons to deploy - Can interconnect with other C series models - Can serve as doorway and vestibule
	 4C model 8.6m X 4m deployed. Hut shaped, 115kgs weight including insulation liner. 5 to 6 persons to deploy Can interconnect with other C series models
7400	 4CT model 7.4m X 4m deployed. Hut shaped, 105kgs weight including insulation liner. 5 to 6 persons to deploy Can interconnect with other C series models Can serve as doorway and vestibule
(mono) in the	5C model - 10.2m X 4m deployed. Hut shaped, - 135kgs weight including insulation liner 7 to 8 persons to deploy - Can interconnect with other C series models - Can serve as doorway and vestibule

Shelter Models 5CT to 6CT series

C Series Models		
	5CT model - 8.9m X 4m deployed. Hut shaped, - 125kgs weight including insulation liner 7 to 8 persons to deploy - Can interconnect with other C series models - Can serve as doorway and vestibule	
	6C model - 11.7m X 4m deployed. Hut shaped, - 155kgs weight including insulation liner 8 persons to deploy - Can interconnect with other C series models	
	6CT model - 10.5m X 4m deployed. Hut shaped, - 145kgs weight including insulation liner 8 persons to deploy - Can interconnect with other C series models	

Note: The insulation liner is an additional canvas layer to create an air pocket between the exterior and interior of the shelter. This serves to bring down temperature in the shelter. This is essential with the usage of Mobile Environmental Control Units. Without this layer, the cost and weight per shelter can be reduced significantly. Number of persons to deploy each shelter will also reduce.